

THE MULTI PURPOSE INDOOR & OUTDOOR LED DOWNLIGHT


SPECIFICATION SHEET



DATE PROJECT TYPE



Specification Code Select from available options to configure luminaire.

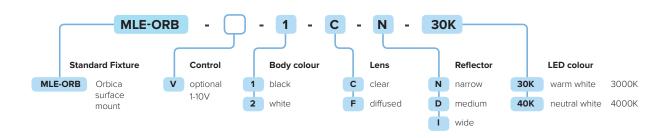

Dimensions Accessories 1 metre Wire Suspension 1 metre Rod Suspension ORB - 1WS wн ORB - 1RS WH MB matt black MB matt black WH matt white WH matt white 170 mm 1 metre 1 metre 129 mm Ø

Edition 1



THE MULTI PURPOSE INDOOR & OUTDOOR LED DOWNLIGHT

SPECIFICATION SHEET



DATE PROJECT TYPE

Luminaire Specifications

IP rating	Ingress Protection IP65	
Materials & finish	aluminium housing	
Lens	clear or diffused	
Reflector	narrow 20°, medium 36°, wide 56°	
Performance	> 70% lumen maintenance at 50,000 hours (25° C)	
Ambient temperature	-25° C to +45° C operating range with electronic thermal management	
Weight	2.7 kg	
Light source	CREE™ LED available in	
	warm white neutral white 3000K 4000K	
CRI	minimum 90 minimum 85	
Luminous intensity	up to 2400 lumens. IES photometric files available	
Efficacy	up to 90 lumens per watt depending on colour temperature	
Control	non dim standard, 1-10V optional	
Power	25 watts total @ 240 VAC	