


Accento 5 RGBW




LED ACCENT LIGHT

ILLUMINATE YOUR WORLD

Specification Code

Example showing how to specify a Accento 5 luminaire.

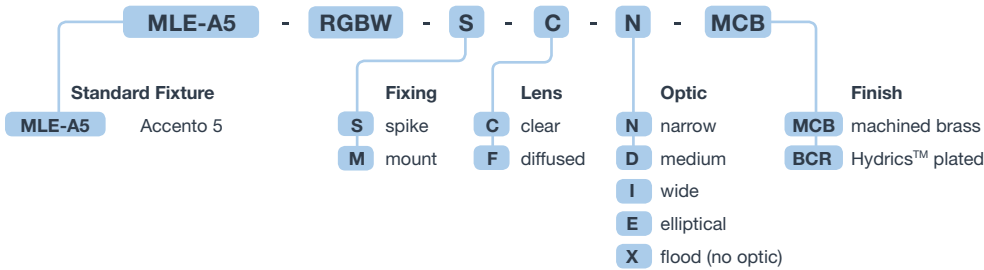



Specifications

| | |
|--------------------|--|
| IP rating | Ingress Protection - IP68 |
| Materials & finish | thermally optimised DZR brass optional Hydrics™ plated finish |
| Lens | clear or diffused 5mm tempered glass |
| Light source | CREET™ MC-E quad chip RGBW LED |
| CRI | variable depending on colour mix |
| Performance | > 70% lumen maintenance at 50,000 hours |
| Optic (FWHM) | narrow 19°, medium 26°, wide 35°, elliptical 45° x 15° flood > 100° (no optic) offers the widest distribution |
| Efficacy | up to 100 lumens per watt |
| Power | 5 watts total |
| Control | DMX 512 or DALI (using the DALI to DMX bridge) |
| Power supply | Optimo QUAD™ MLE-OM-DMX4 |
| | 4 Channels / 1 Group |
| | 12 luminaires |

All dimensions shown are in millimetres (mm)



FINISH OPTIONS




Accessories




MEGABAY PCB LINK BOARD
MLE-RGBW-LK




MEGABAY 10 CORE CABLE
MLE-RGBW-?M





SPIKE FIXING **S**

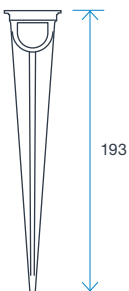


MOUNT FIXING **M**

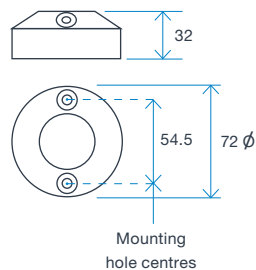

EXTENSION POST

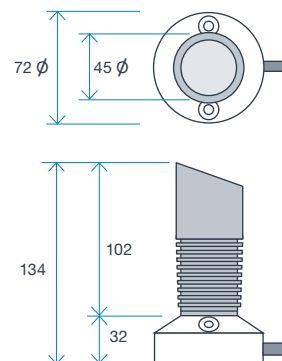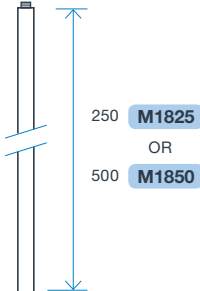

Mount fixing

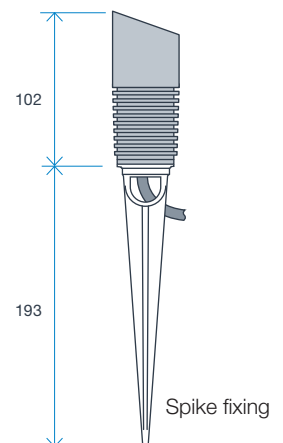

Spike fixing



For the latest information visit - www.megabay.com/accento

Specifications are subject to change without notice. CREET™ is a registered trademark of CREE Inc.