


Osirion 10




LED UPLIGHT & WALL LIGHT

ILLUMINATE YOUR WORLD

Specification Code

Example showing how to specify a Osirion 10 luminaire.

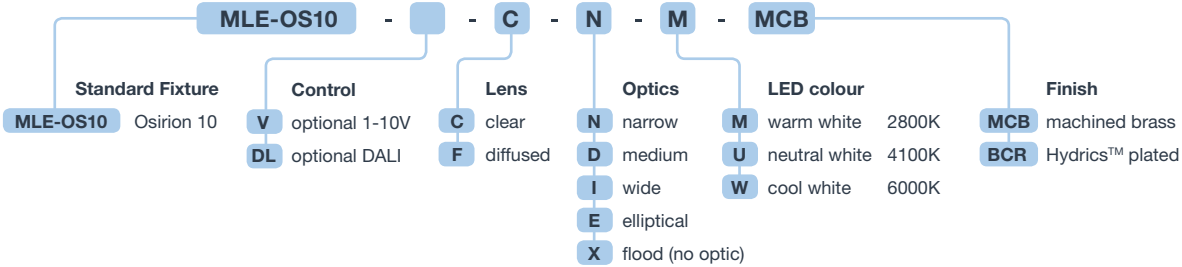


Specifications

IP rating	Ingress Protection - IP68		
Materials & finish	thermally optimised DZR brass optional Hydrics™ plated finish		
Lens	clear or diffused 8mm tempered glass		
Light source	CREE™ XP-G LEDs available in		
	warm white 2800K	neutral white 4100K	cool white 6000K
CRI	85 ~ 90	80 ~ 85	75
Luminous intensity	up to 1000 lumens. IES photometric files available > 70% lumen maintenance at 50,000 hours		
Optic (FWHM)	narrow 14°, medium 29°, wide 38°, elliptical 44° x 12° flood > 100° (no optic) offers the widest distribution		
Efficacy	up to 100 lumens per watt depending on colour temp.		
Power	10 watts total including integral VDi™ driver		
VDi™ driver technology	integral low voltage constant current driver can compensate for voltage drop and fluctuations		
VDi™ thermal intelligence	optimal LED junction temperatures are maintained if the ambient temperature exceeds 45° Celsius		
Control	optional 1-10 volt analogue or DALI digital		
Power supply	Optimo toroidal transformer 25V AC output can power the following number of luminaires :		
	MLE-OT-100	1 - 10 luminaires	
	MLE-OT-200	1 - 20 luminaires	

All dimensions shown are in millimetres (mm)




FINISH OPTIONS







Accessories

SQUARE BLOCKOUT



ROUND BLOCKOUT

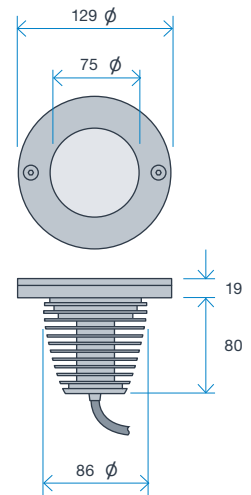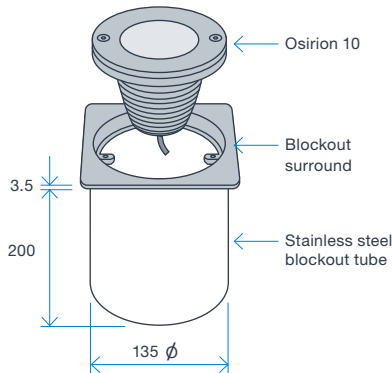

For the latest information visit - www.megabay.com/osirion

Specifications are subject to change without notice. CREE™ is a registered trademark of CREE Inc.